


TY511





TY511

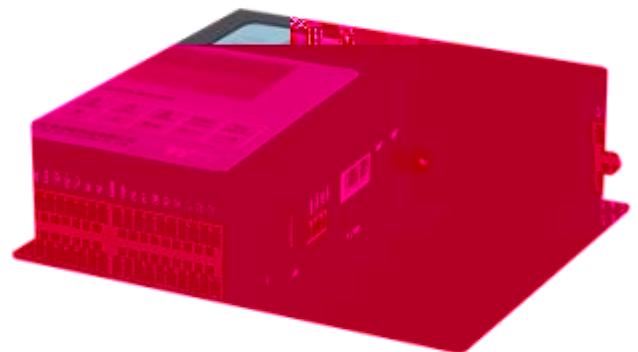


TY511 RTU

4G

RS232 RS485

/

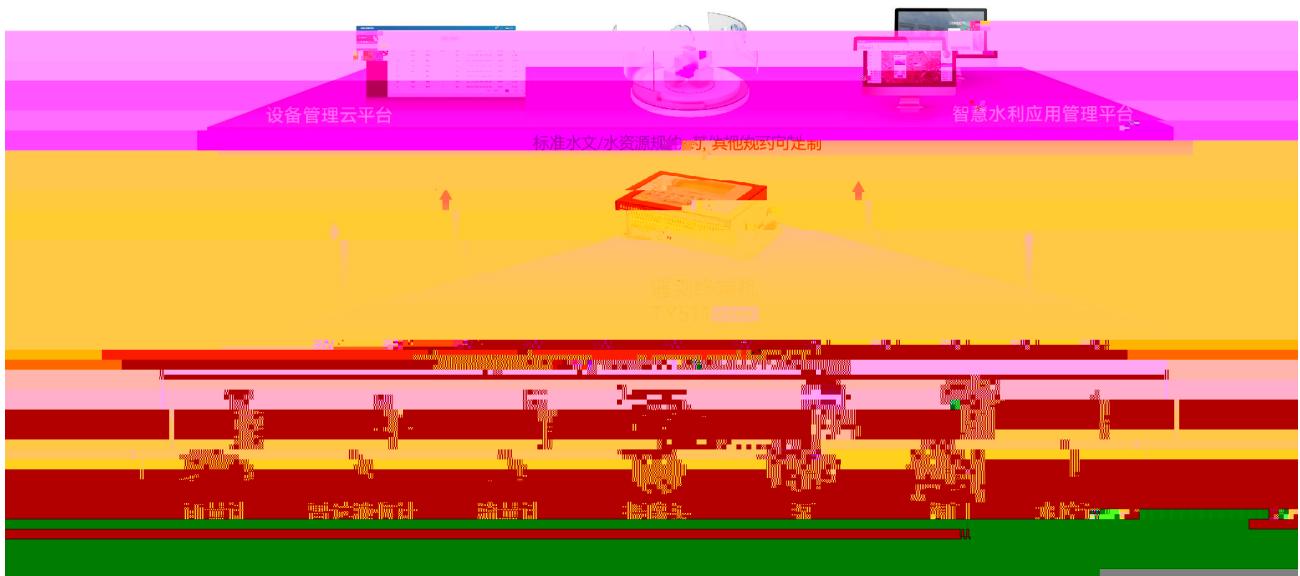



■ 2

2

■ 2 RS232

2 RS485

■ 8

16 AD

4-20mA

0-5V

■ 8

2

■ 8

(2) 1 12

■

■

■

ASCII HEX

■ SL180-2015

■

■

■

■

■


■

■ MODBUS RTU

■ 4G


■ GPRS/4G RS232/RS485 NB-IOT







		DC 12V/1.5A
		DC 5~35V
	RS232	RS485
	15KV ESD	
		300~230400bits/s
		8
		1
	SMA	50
	M3	
LCD	128*64	
	2*8	
	2	0V~1V 2
		2V~30V

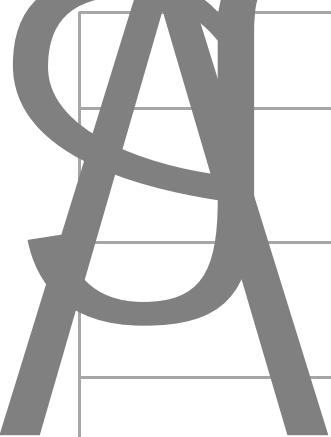

	1	12			
	8		16 AD	4-20mA	
		0-5V			
	8		1	0	0-3VDC
		50mA		5-30VDC	
	2			OC	
		50mA		0V	
2	8		5A	A 120P	30VDC/250VAC



CPU		32
FLASH		512KB
SRAM		256KB
Flash		16MB
TF CARD		16GB



		-40 + 75°C	
		95%	
			40mA 45mA@ 12VDC
			40mA 80mA@ 12VDC
		/	
	3		30A /m
	3		30A /m
	3		100A /m
	3	80MHz~1000M Hz	10V/m
	3		

	IP30	
	(MTBF)	100000h
EMC	3	
NTP	RTC	
SIM/UIM	15KV ESD	
	154.2×127×46.6 mm	
	900g	

